


Stainless Steel Corrugated Flexible Hose

Model: Single Wall-Low Pressure

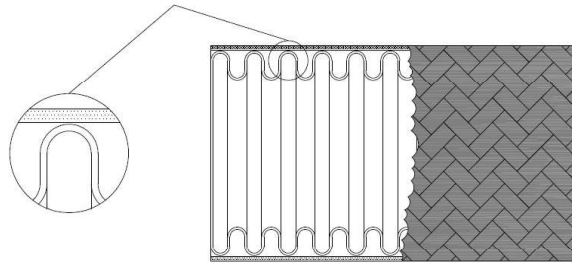

Internal diameter		Braids number	Out diameter mm	Pressure - Bar/g		Minimum Bending Radius- mm	
Inch	mm			Max Operating	Burst	Static	Dynamic
¼	6	1	11	120	480	30	140
		2	12.6	165	660	35	180
3/8	8	1	12.3	90	360	37	220
		2	13.6	140	560	42	260
3/8	10	1	15.5	68	272	43	230
		2		130	520	48	270
½	12	1	17.5	60	240	50	250
		2	18.8	110	440	55	300
5/8	16	1	22.1	50	200	63	300
		2	23.8	100	400	68	360
¾	20	1	26.2	45	180	75	280
		2	28.8	80	320	80	280
1	25	1	32.7	40	160	90	320
		2	35.6	75	300	95	320
1.1/4	32	1	42.8	38	152	110	380
		2	45.6	60	240	115	380
1.1/2	40	1	52.1	35	140	140	420
		2	54.8	55	220	150	420
2	50	1	62.7	25	100	170	490
		2	66.8	45	180	180	490
2.1/2	65	1	83	24	96	250	590
		2	88.5	38	152	300	590
3	80	1	97	18	72	255	700
		2	99	29	116	305	700
4	100	1	119	16	64	280	900
		2	121.5	26	104	330	900
5	125	1	149.2	12	56	600	1200
		2	152.4	18	100	600	1200

Pressure indicated above is referred to ambient temperature (20°) without any pressure