


Stainless Steel Corrugated Flexible Hoses

Model: Single Wall-High Pressure

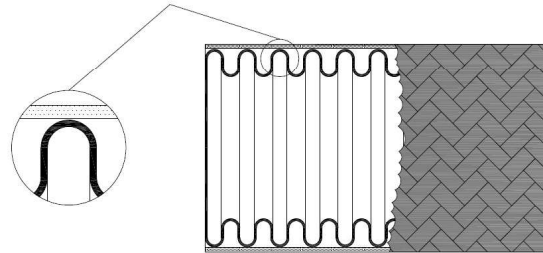

Internal diameter		Braids number	Outer diameter mm	Pressure - Bar/g		Minimus Bending Radius - mm	
Inch	mm			Max Operating	Burst	Static	Dynamic
¼	6	1	11.6	260	1040	25	140
		2	13	300	1200	40	180
3/8	10	1	17.5	170	680	38	220
		2	19.1	250	1000	60	260
½	12	1	20.3	125	500	45	250
		2	21.9	250	1000	70	300
5/8	16	1	25.8	145	580	58	300
		2	27.8	225	900	90	360
¾	20	1	31.2	97	390	70	280
		2	33.2	145	580	70	280
1	25	1	36.2	62	250	85	320
		2	38.2	100	400	85	320
1.1/4	32	1	45	65	260	105	380
		2	47.2	78	310	105	380
1.1/2	40	1	57.3	38	150	130	420
		2	58.2	72	290	130	420
2	50	1	68.2	55	220	160	490
		2	71.3	77	310	160	490
2.1/2	65	1	84.2	31	125	200	590
		2	87.3	36	145	200	590
3	80	1	101.5	30	120	240	700
		2	104.6	51	200	240	700
4	100	1	121	29	120	290	900
		2	124.1	47	190	290	900
5	125	1	149.2	17	70	600	1200
		2	152.4	33	130	600	1200

Pressure indicated above is referred to ambient temperature (20°) without any pressure