


Stainless Steel Corrugated Flexible Hose

Model: Double Wall-Low Pressure

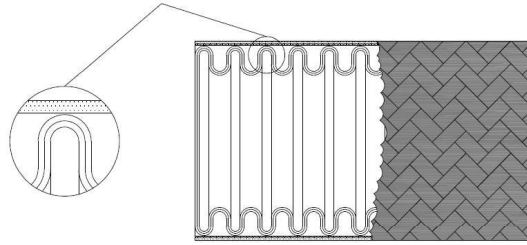

Internal diameter		Braids number	Outer diameter mm	Pressure– Bar/g		Minimum Bending Radius mm	
Inch	mm			Max Operating	Burst	Static	Dynamic
¾	22	1	29	64	256	30	180
		2	31	100	400		
1	25	1	35	60	240	40	210
		2	37	100	400		
1.1/4	32	1	44	50	200	50	240
		2	46	83	332		
1.1/2	40	1	54	43	172	60	280
		2	56	52	208		
2	50	1	66	40	160	70	320
		2	70	50	200		
2.1/2	65	1	84	27	108	78	360
		2	87	38	152		
3	80	1	101	26	104	100	420
		2	104	35	140		
4	100	1	123	20	80	120	500
		2	126	31	124		
5	125	1	151	16	64	150	580
		2	156	30	120		
6	150	1	178	13	52	200	700
		2	182	25	100		
8	200	1	233	10	40	270	850
		2	238	20	80		

Pressure indicated above is referred to ambient temperature (20°) without any pressure