


## Stainless Steel Corrugated Flexible Hose

### Model: Double Wall-High Pressure

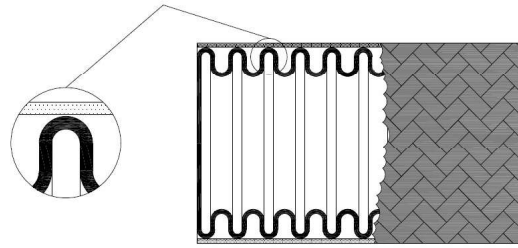

Internal diameter		Braids number	Outer diameter mm	Pressure – Bar/g		Minimum Bending Radius mm	
Inch	mm			Max Operating	Burst	Static	Dynamic
¾	22	1	29	83	332	50	200
		2	31	130	520		
1	25	1	35	78	312	60	230
		2	37	130	520		
1.1/4	32	1	44	65	260	70	260
		2	46	108	432		
1.1/2	40	1	54	56	224	80	300
		2	56	68	272		
2	50	1	66	52	208	90	340
		2	70	65	260		
2.1/2	65	1	84	35	140	100	380
		2	87	50	200		
3	80	1	101	34	136	120	440
		2	104	45	180		
4	100	1	123	26	104	140	520
		2	126	40	160		
5	125	1	151	20	80	170	600
		2	156	39	156		
6	150	1	178	16	64	230	740
		2	182	32	128		
8	200	1	233	13	52	300	880
		2	238	26	104		

**Pressure indicated above is referred to ambient temperature (20°) without any pressure**