



## Certified Metal Flexible Hoses

Model: **D12**

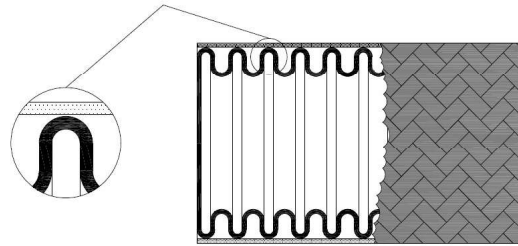

Code	Internal diameter		Wall number	Braids number	External diameter mm	Pressure – Bar/g		Bending radius - mm	
	Inch	mm				Max Operating	Burst	Static	Dynamic
D12010	3/8"	8	1	2	16	180	500	60	260
D12012	1/2"	12,5	1	2	22	180	500	70	300
D12020	3/4"	21	2	2	31	125	500	70	400
D12025	1"	25	2	2	37	100	400	85	450
D12032	1"1/4	33,2	2	2	46	100	400	105	500
D12040	1"1/2	40	2	2	54	80	320	130	550
D12050	2"	50	2	2	65	62	248	160	620
D12065	2"1/2	66	2	2	85	50	200	200	700
D12080	3"	76	2	2	98	40	160	240	850
D12100	4"	100	2	2	124	30	120	290	1000
D12125	5"	125	2	2	156	30	120	600	1200
D12150	6"	150	2	2	179	25	100	1100	1300

Pressure indicated above is referred to ambient temperature (20°) without any pressure

<b>TYPE APPROVAL DNV GL</b>	<b>TAP00000J0</b>	
<b>TYPE APPROVAL ABS</b>	<b>T1586857</b>	
<b>CRN – CANADIAN REGISTRATION NUMBER – D12010:125</b> (Fino DN100)	<b>0D7003</b>	
<b>TYPE APPROVAL BUREAU VERITAS</b> (Fino DN100)	<b>61379/A0 BV</b>	